

# BMI - 2BE Mandolin



## EXTERNAL MANDOLIN PICKUP

The transducers is very responsive to top vibrations.


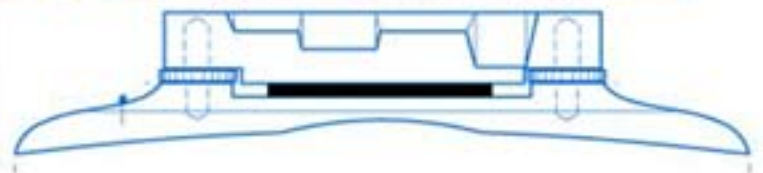


plate  
2 sensors  
elastic 1 (2mm)  
elastic 2 (2mm optional)



plate 10mm  
sensor 7mm

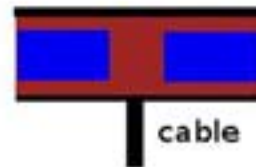

Double foot clamp

## FEATURES

Mandolin pickup specially made to meet all working conditions.

Matches to every Amp or console input. The Double acoustic sensor is a piezo transducer that is designed for external mount in Mandolin.

This is a passive pickup. While a preamp is not required, it is highly recommended and will improve performance, especially with long cable runs.

## INSTALLATION

Installation is simple and requires no permanent alteration of your instrument. The double sensor mount in the bridge's wing. Customize the pressure with extra piece of rubber. Include a 1/4 carpenter stereo jack, that clamps to the side of the instrument and you're ready to plug in. Connect to any console in two channels with stereo cable.

